



AMALFI "A"

Modular electric oven for pizzeria

COMPOSITION WITH 2 BAKING CHAMBERS



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- ☐ Leavening prover on wheels, height 800mm
- ☐ Support with wheels, height 600mm
- ☐ Support with wheels, height 800mm
- ☐ Additional tray holder guides for compartment and support
- ☐ Suction hood

(WITHOUT SURCHARGE)

- ☐ Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- ☐ Structure made in folded stainless steel
- ☐ Side panels in pre-painted sheet metal
- ☐ Stainless steel hood with aluminised steel top cover
- ☐ Front vapour collection hood in HT coating steel sheet
- ☐ Steam duct in stainless steel plate
- ☐ Stainless steel door with bottom hinge and spring balance
- ☐ Tempered glass element
- ☐ Handles in thermoplastic material
- ☐ Control panel on front right hand side

INTERNAL CONSTRUCTION

- ☐ Refractory brick baking surface
- ☐ Refractory top and side structure
- ☐ Rock wool heat insulation

FUNCTIONING

- ☐ Heated by spiral heating elements
- ☐ Electronic temperature management with independent adjustment of ceiling and floor
- ☐ Maximum temperatura reached 450°C
- ☐ Continuous temperature monitoring with thermocouple
- ☐ Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- ☐ Lighting with halogen lamp
- ☐ Timer
- ☐ Economiser
- ☐ Independent maximum temperature safety device
- ☐ 20 customisable programs



MORETTI FORNI S.P.A.

www.morettiforni.com

info@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA


Tel. +39.0721.96161 - Fax +39.0721.9616299



AMALFI "A"

2 baking chambers height 18cm

(assembled with support height 800mm)

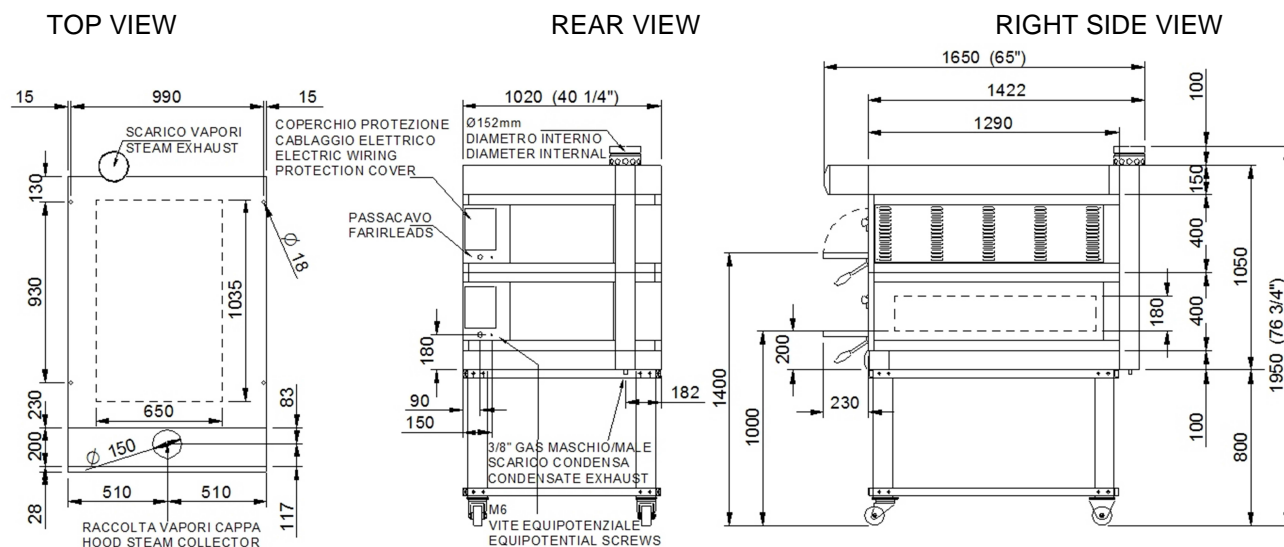

Note: The dimensions indicated in the views are in millimeters.

SPECIFICATIONS

The appliance comprises two independent baking elements and an optional Leavening prover or support. The oven baking surface is made of refractory, allowing perfect heat distribution over the whole surface and making this oven particularly suitable for baking pizza directly or on trays. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is baking. The support comprises a painted metal structure, whereas the Leavening prover has a stainless steel structure and is fitted with a heating thermostat. The Leavening prover can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C.

All the data provided below refer to the configuration with 2 baking chambers

DIMENSIONS		SHIPPING INFORMATION	FEEDING AND POWER
External height	1150mm	Packed in wooden crate	<i>Standard feeding</i>
External depth	1651mm	Height	1300mm
External width	1020mm	Depth	1851mm
Weight	378kg	Width	1220mm
Baking surface	1,4m ²	Weight	(378+60)kg
TOTAL BAKING CAPACITY		When combined with Leavening prover or support:	<i>Feeding on request</i>
		Max height	2250mm
Tray (600x400)mm	4	Max weight	(461+70)kg
Pizza diameter 300mm	12		
Pizza diameter 450mm	4		
			Frequency 50/60Hz
			Max power 14,2kW
			Average power cons 7,1kWh
			Connecting cable for each chamber
			type H07RN-F
			5x4mm ² (V400 3N)
			4x6mm ² (V230 3)
			Power supply (optional Leavening prover)
			A.C. V230 1N 50/60 Hz
			Max power 1,5kW
			Average power cons 0,8kWh
			Conn. Cable type H07RN-F
			3x1,5mm ²

* This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice